

Virtus Module

250W, 255W, 260W



High Module Conversion Efficiencies



Easy Installation and Handling




Mechanical Load Capability of up to 5400 Pa



Conforms with IEC 61215:2005,
IEC 61730: 2004, UL 1703 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified

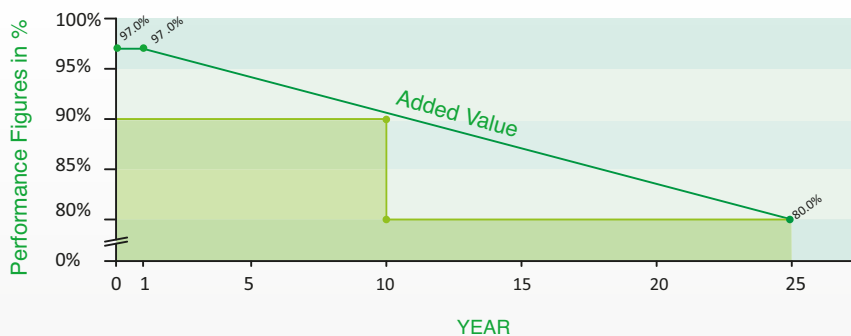

● Linear Performance Warranty

● Traditional Warranty

10-year


material & workmanship

25-year

linear power output




Dimensions

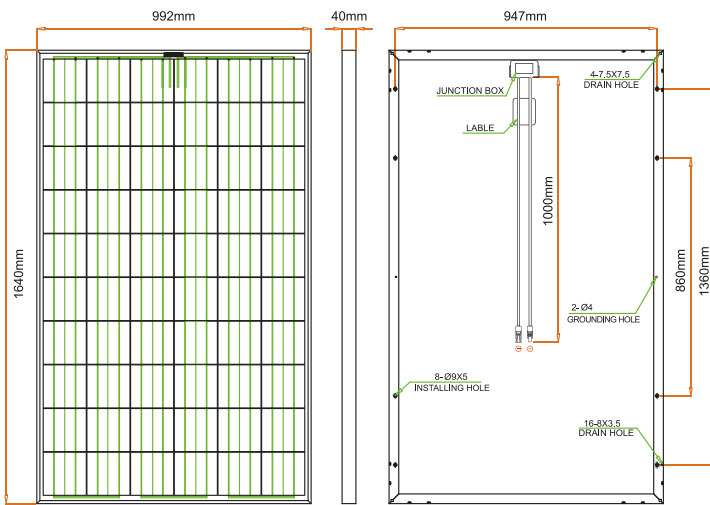

Drawing Only for Reference

I-V Curves

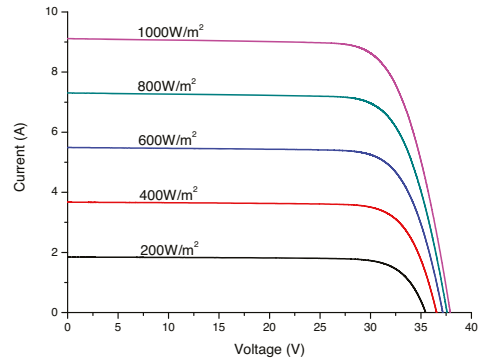

Varied Irradiation Efficiencies

| Irradiance | 200W/m ² | 400W/m ² | 600W/m ² | 800W/m ² | 1000W/m ² |
|------------|---------------------|---------------------|---------------------|---------------------|----------------------|
| Efficiency | 15.7% | 16.0% | 16.1% | 16.1% | 16.0% |

Electrical Characteristics STC

| | JC250M-24/Bbv | JC255M-24/Bbv | JC260M-24/Bbv |
|-----------------------------|---------------|---------------|---------------|
| Maximum Power (Pmax) | 250 W | 255 W | 260 W |
| Power Tolerance | 0 ~ +5W | 0 ~ +5W | 0 ~ +5W |
| Module Efficiency | 15.4% | 15.7% | 16.0% |
| Maximum Power Current (Imp) | 8.29 A | 8.43 A | 8.56 A |
| Maximum Power Voltage (Vmp) | 30.2 V | 30.3 V | 30.4 V |
| Short Circuit Current (Isc) | 8.84 A | 8.98 A | 9.09 A |
| Open Circuit Voltage (Voc) | 37.3 V | 37.4 V | 37.6 V |

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

| | JC250M-24/Bbv | JC255M-24/Bbv | JC260M-24/Bbv |
|-----------------------------|---------------|---------------|---------------|
| Maximum Power (Pmax) | 186 W | 189 W | 193 W |
| Maximum Power Current (Imp) | 6.59 A | 6.69 A | 6.77 A |
| Maximum Power Voltage (Vmp) | 28.2 V | 28.2 V | 28.5 V |
| Short Circuit Current (Isc) | 7.13 A | 7.20 A | 7.27 A |
| Open Circuit Voltage (Voc) | 35.0 V | 35.0 V | 35.2 V |

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

| | |
|----------------------------|---|
| Cell Type | 156 x156 mm Virtus, 60 (6x10) pcs in series |
| Glass | High Transmission, Low Iron, Tempered Glass |
| Frame | Anodized Aluminum Alloy |
| Junction Box | IP65/IP67 rated, with bypass diodes |
| Dimension | *1640 x 992 x 40 mm |
| Output Cable | 4 mm ² (EU)/12 AWG (US), 1000 mm |
| Weight | 19 Kg |
| Installation Hole Location | See Drawing Above |

Characteristics

| | |
|---|-----------|
| Temperature Coefficient of Voc | -0.29%/°C |
| Temperature Coefficient of Isc | 0.04%/°C |
| Temperature Coefficient of Pmax | -0.39%/°C |
| Nominal Operating Cell Temperature (NOCT) | 45°C±2°C |

Packing Information

| | 20' GP | 40' GP | 40' HQ |
|-----------------------|--------|--------|--------|
| Container | 20' GP | 40' GP | 40' HQ |
| Pallets per Container | 12 | 28 | 28 |
| Pieces per Container | 300 | 700 | 770 |

Rev No: JC/TDS/2012.06 *Contact ReneSola for tolerance specification
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.

Maximum Ratings

| | |
|----------------------------|----------------------------|
| Operating Temperature | -40°C ~ + 85°C |
| Maximum System Voltage | 1000VDC (EU) / 600VDC (US) |
| Maximum Series Fuse Rating | 20A (EU) / 15A (US) |