

# STP265S - 20/Wd

# STP260S - 20/Wd

## 265 Watt

### MONOCRYSTALLINE SOLAR MODULE



#### Features



#### High module conversion efficiency

16.3%

Module efficiency up to 16.3% achieved through advanced cell technology and manufacturing capabilities



#### Excellent weak light performance

Excellent performance under low light conditions



#### Positive tolerance

0/+5%

Positive tolerance of up to 5% delivers higher outputs reliability



#### Suntech current sorting process

2%

System output maximized by reducing mismatch losses up to 2% with modules sorted & packaged by amperage



#### Extended wind and snow load tests

3800Pa  
5400Pa

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) \*



#### PID resistant


Advanced cell technology and qualified materials lead to high resistance to PID

Certifications and standards:  
IEC 61215, IEC 61730, conformity to CE



#### Trust Suntech to Deliver Reliable Performance Over Time


- World-class manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards: ISO 9001: 2008, ISO 14001: 2004 and ISO17025: 2005
- Regular independently checked production process from international accredited institute/company
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing testing: IEC 61701, 2PfG 1917/05.11, DIN EN 60068-2-68)\*\*\*



#### Compact and Durable Frame Design

Suntech's new compact frame design is light-weight and easier to handle during installation. The rigid and durable hollow chamber guarantees the same long-term and reliable performance.

#### Industry-leading Warranty based on nominal power

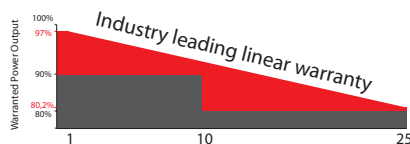

- 97% in the first year, thereafter, for years two (2) through twenty-five (25), 0.7% maximum decrease from MODULE's nominal power output per year, ending with the 80.2% in the 25th year after the defined WARRANTY STARTING DATE.\*\*\*\*
- 10-year material and workmanship warranty




#### IP67 Rated Junction Box

IP67 rated junction box supports installations in multiple orientations. High reliable performance, low resistance connectors ensure maximum output for the highest energy production.

\* Please refer to Suntech Standard Module Installation Manual for details. \*\*PV Cycle only for EU market.

\*\*\* Please refer to Suntech Product Near-coast Installation Manual for details. \*\*\*\* Please refer to Suntech Product Warranty for details.

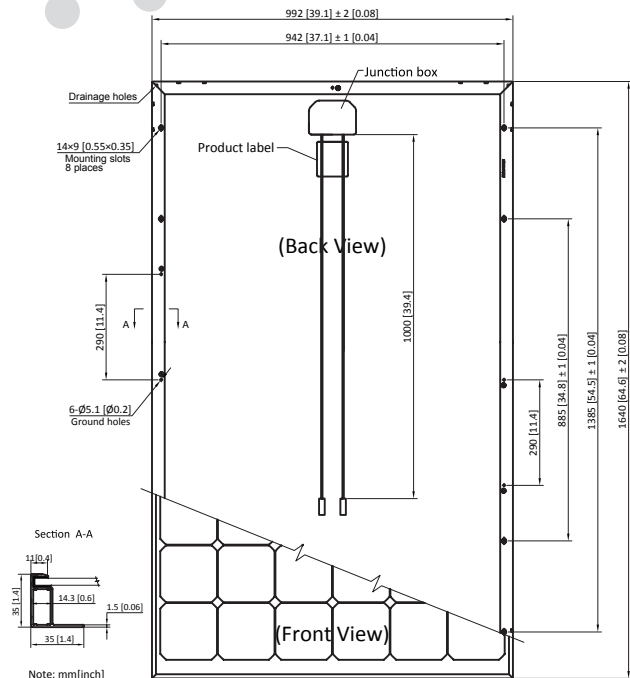

**Electrical Characteristics**


| STC                             | STP265S-20/Wd    | STP260S-20/Wd |
|---------------------------------|------------------|---------------|
| Maximum Power at STC (Pmax)     | 265 W            | 260 W         |
| Optimum Operating Voltage (Vmp) | 31.0 V           | 30.9 V        |
| Optimum Operating Current (Imp) | 8.55 A           | 8.42 A        |
| Open Circuit Voltage (Voc)      | 37.8 V           | 37.7 V        |
| Short Circuit Current (Isc)     | 9.01 A           | 8.89 A        |
| Module Efficiency               | 16.3%            | 16.0%         |
| Operating Module Temperature    | -40 °C to +85 °C |               |
| Maximum System Voltage          | 1000 V DC (IEC)  |               |
| Maximum Series Fuse Rating      | 20 A             |               |
| Power Tolerance                 | 0/+5 %           |               |

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5;  
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

| NOCT                            | STP265S-20/Wd | STP260S-20/Wd |
|---------------------------------|---------------|---------------|
| Maximum Power at NOCT (Pmax)    | 193 W         | 190 W         |
| Optimum Operating Voltage (Vmp) | 28.2 V        | 28.1 V        |
| Optimum Operating Current (Imp) | 6.86 A        | 6.75 A        |
| Open Circuit Voltage (Voc)      | 34.8 V        | 34.7 V        |
| Short Circuit Current (Isc)     | 7.24 A        | 7.16 A        |

NOCT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s;  
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

**Current-Voltage & Power-Voltage Curve (260S-20)**

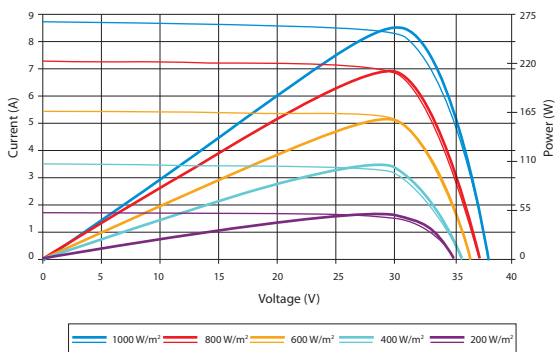

Excellent performance under weak light conditions: at an irradiation intensity of 200 W/m<sup>2</sup> (AM 1.5, 25 °C), 95.5% or higher of the STC efficiency (1000 W/m<sup>2</sup>) is achieved


**Temperature Characteristics**

|   |            |
|---|------------|
| Nominal Operating Cell Temperature (NOCT) | 45±2°C     |
| Temperature Coefficient of Pmax           | -0.44 %/°C |
| Temperature Coefficient of Voc            | -0.34 %/°C |
| Temperature Coefficient of Isc            | 0.060 %/°C |

**Mechanical Characteristics**

|               |  |
|---------------|--|
| Solar Cell    | Monocrystalline silicon 156 × 156 mm (6 inches)  |
| No. of Cells  | 60 (6 × 10)  |
| Dimensions    | 1640 × 992 × 35mm (64.6 × 39.1 × 1.4 inches)   |
| Weight        | 18.2 kgs (40.1 lbs.)   |
| Front Glass   | 3.2 mm (0.13 inches) tempered glass  |
| Frame         | Anodized aluminium alloy   |
| Junction Box  | IP67 rated (3 bypass diodes)   |
| Output Cables | TUV (2Pfg1 169:2007)<br>4.0 mm <sup>2</sup> (0.006 inches <sup>2</sup> ), symmetrical lengths (-) 1000mm (39.4 inches) and (+) 1000 mm (39.4 inches) |
| Connectors    | Original MC4 connectors  |

**Dealer information**



**Packing Configuration**

| Container             | 20' GP | 40' HC |
|-----------------------|--------|--------|
| Pieces per pallet     | 30     | 30     |
| Pallets per container | 6      | 28     |
| Pieces per container  | 180    | 840    |

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.